


# VELAN CONNECTORS

## VELAN CONNECTORS FOR HERMETICALLY SEALED UNIVERSAL STEAM TRAP

Velan connectors are designed to be used with swivel connector steam traps.

The connector can be installed horizontally or vertically into the pipeline. The steam trap is attached to the connector by means of two hexagon screws and can be rotated 360 degrees to ensure the trap is in correct orientation.

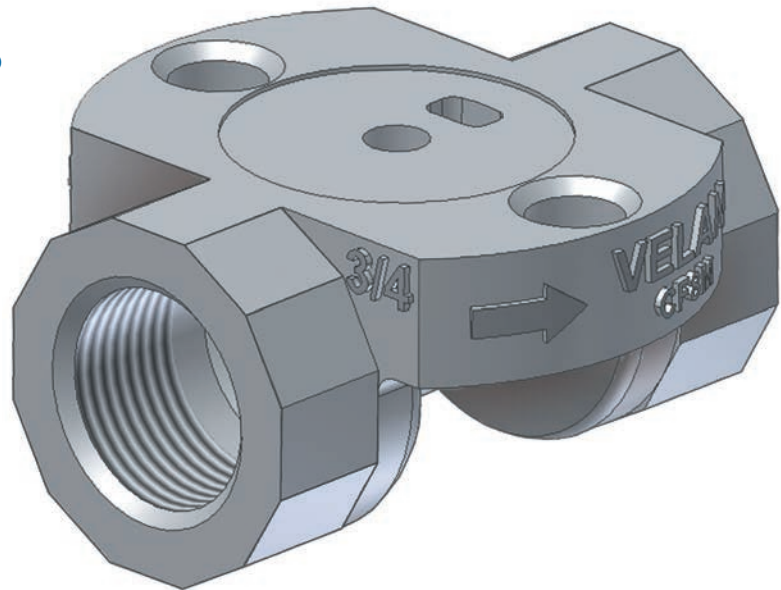


### CONNECTIONS

- Screwed
- Socket-weld

### ENGINEERING DATA

PRESSURE RANGE psig / barg	MATERIAL	MAX TEMP <sup>(1)</sup> °F / °C
0-450 0-31	SS CF8M	600 315

(1) Consult works if the expected service temperature will be >500°F (260°C) as the ferrite level has to be controlled.

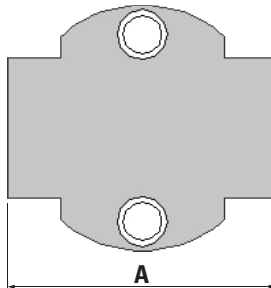

### DIMENSIONS AND WEIGHTS

SIZE NPS / DN	A FACE TO FACE	WEIGHT lb / kg
1/2 15	2 7/16 62	1.1 0.5
3/4 20	2 7/8 73	1.2 0.55
1 25	3 1/2 89	1.9 0.86

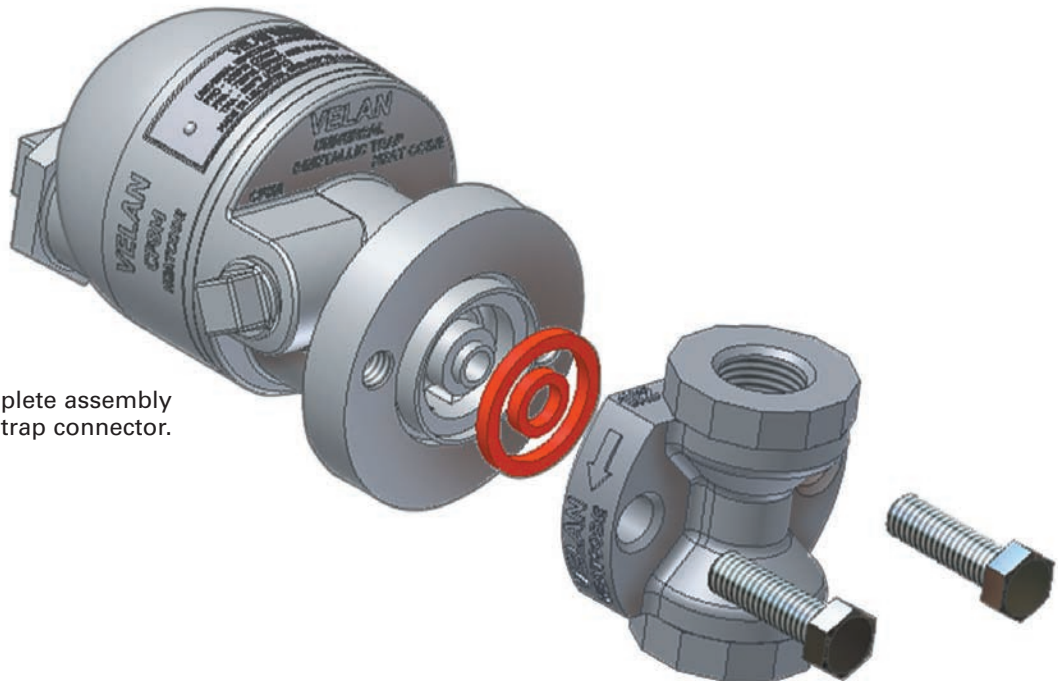


Illustration showing a complete assembly of universal steam trap connector.